GLENCORE

Maintenance Work Management

DILO / WILO

MAINTENANCE PLANNER

08

Date, Version	27/01/2022, v1.0
Department, Area	Glencore Copper, Operational Excellence
Prepared by	D Ord, M O'Neill (Bluefield AMS)
Reviewed by	R Reisener, A Green (Glencore Copper)
Comment/s	Published

Table of Contents


Overview & Purpose 2
Day In the Life Of (DILO) 3
Week In the Life Of (WILO) 5

Overview & Purpose

The Glencore Copper Asset Management Framework (AMF) enables the business to deliver its Asset Management purpose and vision, as defined in the AMF Policy. The Framework consists of 18 Elements, detailed in Manuals that define how Glencore Copper manages the whole life of its assets to optimise value and ensure assets are capable of meeting the business and stakeholder objectives.

Maintenance Work Management is Element 08 of the AMF and defines effective work management practices and performance requirements to enable work to be performed safely, efficiently, with precision and when required.

This document is intended to provide Maintenance Planners with guidance on how to approach their daily and weekly rhythms in the **Maintenance Work Management** work cycle. A **Guideline** document is available for each of the six sub-processes of **Maintenance Work Management** process shown below, detailing how to complete each process step, and should be referred to for further understanding.

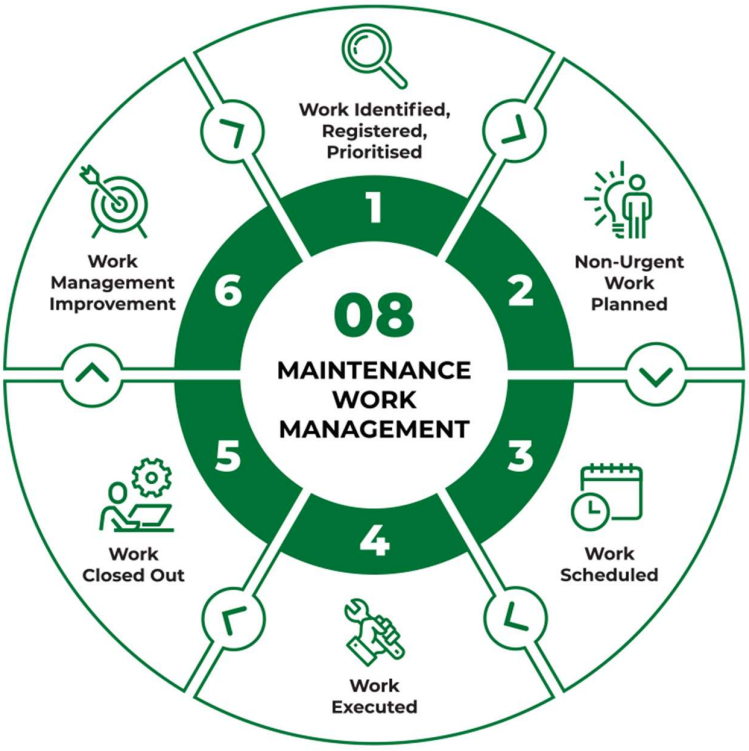

Day In the Life Of (DILO)


The following is a list of activities that a Maintenance Planner should be completing on a **daily** basis:

	Activity	SAP Process	Reference Docs
☐	Review all approved notifications with a priority of 3, 4 or 5 that have not been created into a work order. Update or reject as necessary.	**Change Notifications (IW28)** – "In Process" (NOPR), excluding ORAS	**QRG Notification Put in Process & Reject** **E08 Guideline 2 (step 2a)**
☐	Create PM01 Work Orders from Approved Notifications. Raise from a Task List where one exists.	**Change Notifications (IW28)**	**QRG Create & Plan PM Order (Internal)** **QRG Create Work Order from Task List** **E08 Guideline 2 (step 2a)**
☐	For each Work Order, complete planning as following: • Identify job steps and add Operations as needed. • Review Work Order instructions including document attachments. • Add internal labour hours to each Operation. • Identify External Resources and raise Service Requisition/s as needed. • Identify parts/materials required and add components. • Identify non-catalogued materials – Raise ATC. For Work Orders in planning, set User Status to In Planning (INPL). Set User Status to On Hold (HOLD) where planning cannot be completed. For Work Order where planning is complete, set User Status to Planned (PLND).	**Change PM Orders (IW38)** or **Change Orders and Operations (IW37N)** *Note: Alternatively,* **Change Maintenance Order (IW32)** *can be used for individual Work Orders*	**QRG Add Operations to Maintenance Work Order** **QRG Add Components to PM Order** **Add Rotable Component for Change Out** **QRG Add Services (External Labour) to Work Order** **E08 Guideline 2 (steps 2b, 2c)**
☐	Release Work Orders when appropriate to raise reservations.	**Change PM Orders (IW38)** or **Change Orders and Operations (IW37N)** *Note: Alternatively,* **Change Maintenance Order (IW32)** *can be used for individual Work Orders*	**QRG Release Work Order** **E08 Guideline 2 (step 2c)**
☐	Attend daily **Team Pre-Start Meeting** for the execution team as required to monitor effectiveness of current schedule and any impacts to W+1. Discuss impacts with Maintenance Supervisor		**E08 Guideline 4 (step 4b)**

☐	Manage archiving and document management procedures.		

Week In the Life Of (WILO)

Below is an overview of the meeting schedule undertaken each week as part of the Maintenance Work Management process.

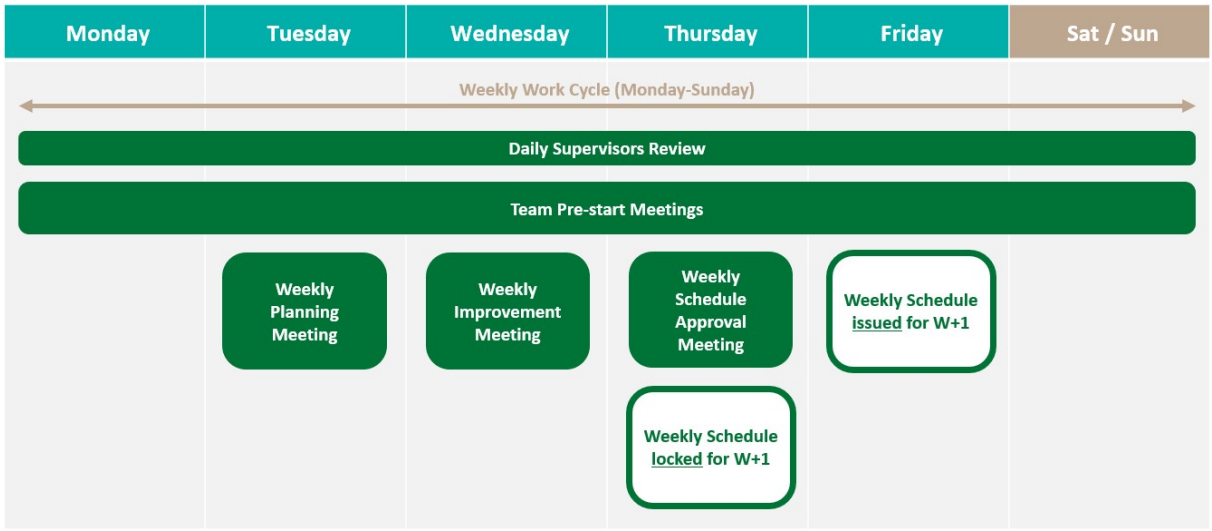

The following is a list of activities that a Maintenance Planner should be completing on a **weekly** basis, separated into days:

	Activity	SAP Process	Reference Docs
	Monday		
☐	Review Work Orders not TECO'd from previous week (W-1) and update the Basic Start Date (pending planning/rescheduling) or cancel if necessary (Business Complete).	Change PM Orders (IW38)	QRG Work Order Search E08 Guideline 3 (step 3a)
☐	Run reports on Statutory / Critical Control / Safety work, both planned and completed. Where Work Orders have been completed but remain open (User Status MCMP), TECO when ready (reports loaded etc.)	Change PM Orders (IW38) – review for MaintActivityType = 330/340/630/640	QRG Work Order Search E08 Guideline 3 (step 3a)
☐	Review lookahead and check material and resource requirements / approvals / delivery times. Note items for discussion in **Weekly Planning Meeting** (materials forecast). Update Work Order Basic Start Date as required.	Change Maintenance Order (IW32) – check resource requirements Material Availability Coordinator (MAC) – check outstanding materials	QRG Work Order Search E08 Guideline 3 (step 3a)

☐	Review work centre capacities with supervisor and update capacities as required.	**Prometheus Shift Updater**	**QRG Prometheus Shift Sequences - Rosters** **QRG Prometheus Shift Updater** **E08 Guideline 3 (step 3a)**
☐	Generate draft schedules for W+1 and W+2. • Align schedules with Production schedule / equipment availability forecast from Operations Planner / Supervisor. • Arrange Work Orders into days/shifts. • Capacity plan W+1 schedule.	**Prometheus Scheduler**	**QRG Prometheus Scheduler** **E08 Guideline 3 (step 3a)**
Tuesday			
☐	Facilitate the **Weekly Planning Meeting**.	Formal meeting using **Prometheus Scheduler**	**E08 Guideline 3 (step 3b)** **E08 Guideline 3: Weekly Planning Meeting** agenda
☐	Update Basic Start Date for Work Orders in accordance with the guidance obtained in the **Weekly Planning Meeting** and complete any other actions. *Note: Revisions are used for grouping Work Orders for a specific purpose, shutdowns or those associated with a weekly schedule. These shall be used to improve efficiency of the Planning and Scheduling process. Refer to the PM Planning Objects Master Data Guideline for additional details.*	**Prometheus Scheduler** **Change PM Orders (IW38)** or **Change Orders and Operations (IW37N)**	**E08 Guideline 3 (step 3c)**
☐	Prepare and analyse KPI Reports for W-1, in preparation for the **Weekly Improvement Meeting**.		**QRG Reporting Information** **E08 Guideline 6 (step 6a)**
Wednesday			
☐	Complete updates to W+1 schedule, achieving capacity planning target for each day.	**Prometheus Scheduler**	**Prometheus Scheduler** **E08 Guideline 3 (step 3c)**
☐	Liaise with other workgroup planners (e.g. electrical, projects, vulcanisers etc) to ensure that sequencing of work fits in with their workgroup schedules.		**E08 Guideline 3 (step 3c)**
☐	Review materials availability to ensure all materials are available for planned W+1 activity.	**Material Availability Coordinator (MAC)** – Check outstanding materials	**E08 Guideline 3 (step 3c)**
☐	Check no changes to work centre capacity for W+1, update if needed.	**Prometheus Shift Updater**	**QRG Prometheus Shift Update** **E08 Guideline 3 (step 3c)**

☐	Complete final checks and finalise the draft schedule for W+1, ready for final approval the following day.	**Prometheus Scheduler**	**QRG Prometheus Scheduler** **E08 Guideline 3 (step 3c)**
☐	Attend the **Weekly Improvement Meeting.**		**E08 Guideline 3: Weekly Improvement Meeting** agenda
Thursday			
☐	Facilitate the **Weekly Schedule Approval Meeting**.	Formal Meeting – outcome is W+1 schedule approved (with final actions) by key stakeholders	**E08 Guideline 3 (step 3d)** **E08 Guideline 3: Weekly Schedule Approval Meeting** agenda
☐	Make any agreed final adjustments to the schedule.	**Prometheus Scheduler** Note: Alternatively, this can be accessed via ***Change PM Orders (IW38)*** or ***Change Orders and Operations (IW37N)***	**E08 Guideline 3 (step 3d)**
☐	Check all W+1 scheduled Work Orders have User Status Scheduled (SCHD).	**Change PM Orders (IW38)** *Note: Alternatively, this can be accessed via* **Change Orders and Operations (IW37N)**	**E08 Guideline 3 (step 3d)**
Friday			
☐	Communicate locked schedule to Key Business Stakeholders.	Email	**E08 Guideline 3 (step 3e)**
☐	Distribute physical copies of all W+1 scheduled Work Orders and attachments (i.e. job packs) to the Maintenance Supervisor.	**Change Maintenance Order (IW32)**	**QRG Batch Print Work Orders** **E08 Guideline 3 (step 3e)**
☐	Create Measurement Documents and reset Measuring Points where required. *Note: Review Annual Estimates monthly or quarterly, depending on equipment use.* *If annual estimate requires updating, changes shall be done via MDG.*	**Create Measurement Document (IK11)** *Note: Alternatively, bulk updating can be done via* **Collective Entry of MeasDocuments (IK14)** *or* **PM-Load Measurement Documents from File (ZPM_MEASUR_DOC_LOAD)**	**QRG Measuring Documents & Measuring Points** **E08 Guideline 2 (step 2c)**
☐	Process any Master Data changes as identified during the week. Progress assigned actions from the **Weekly Improvement Meeting**.	**MDG**	**E08 Guideline 6**



GLENCORE

160 Ann Street · Brisbane · QLD 4000 · Australia
Tel +61 7 3833 8500 · Web www.glencore.com.au

Glencore Australia Holdings Pty Limited ABN 37 160 626 102