GLENCORE

Maintenance Work Management

DILO / WILO

MAINTENANCE SUPERVISOR

08

Date, Version	27/01/2022, v1.0
Department, Area	Glencore Copper, Operational Excellence
Prepared by	D Ord, M O'Neill (Bluefield AMS)
Reviewed by	R Reisener, A Green (Glencore Copper)
Comment/s	Published

Table of Contents


Overview & Purpose 2
Day In the Life Of (DILO) 3
Week In the Life Of (WILO) 6

Overview & Purpose

The Glencore Copper Asset Management Framework (AMF) enables the business to deliver its Asset Management purpose and vision, as defined in the AMF Policy. The Framework consists of 18 Elements, detailed in Manuals that define how Glencore Copper manages the whole life of its assets to optimise value and ensure assets are capable of meeting the business and stakeholder objectives.

Maintenance Work Management is Element 08 of the AMF and defines effective work management practices and performance requirements to enable work to be performed safely, efficiently, with precision and when required.

This document is intended to provide Maintenance Supervisors with guidance on how to approach their daily and weekly rhythms in the **Maintenance Work Management** work cycle. A **Guideline** document is available for each of the six sub-processes of **Maintenance Work Management** process shown below, detailing how to complete each process step, and should be referred to for further understanding.

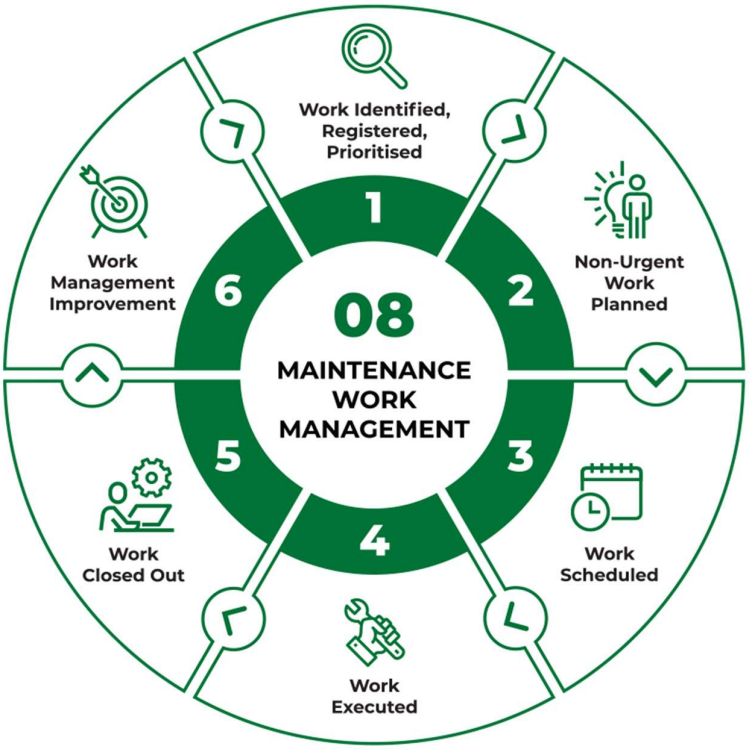

Day In the Life Of (DILO)

The following is a list of activities that a Maintenance Supervisor should be completing on a **daily** basis:


	Activity	SAP Process	Reference Docs
☐	Review all outstanding Notifications and reject or approve as appropriate. Ensure that the work Priority and other details are correct. Determine if job scoping is required and delegate.	**Change Notifications (IW28)** – "Outstanding" checkbox ticked on search	**QRG Notification Put in Process & Reject** **E08 Guideline 1 (steps 1c, 1d)**
☐	Review shift logs to see if any other urgent work or other issues are noted.		Shift logs
☐	Meet with the Operations Supervisor (**Daily Supervisors Review**): • Review new Priority 1 and 2 Notifications and confirm that priority is correct. • Assess the impact of completing the Priority 1 and 2 work in the current shift and schedule. Will it require work to be deferred? If so, identify which work will be deferred. Get agreement from Operations Supervisor. • Confirm the daily work list and that Operations tasks are in hand (cleaning, isolations etc).		**E08 Guideline 1 (step 1e)** **E08 Guideline 1: Daily Supervisors Review** agenda
☐	Raise (from Notification), plan, release and print Work Orders for new urgent work. Add Operations, materials (including rotables) and services required to complete the work. *Note: Job scoping and planning tasks can be delegated to Leading Hand / Technical Officer and Trades as appropriate.*	**Change Notifications (IW28)** *Note: Alternatively,* **Change PM Notification (IW22)** *can be used for individual Notifications* **Change PM Orders (IW38)** or **Change Orders and Operations (IW37N)**	**QRG Create & Plan PM Order (Internal)** **QRG Create Work Order from Task List** **QRG Add Components to PM Order** **QRG Add Rotable Component for Change Out** **QRG Add Services (External Labour) to Work Order** **QRG Service Requisition Attachments and Notes** **QRG Release Work Order** **QRG Print Work Order** **E08 Guideline 4 (step 4a)**

☐	Conduct the **Team Pre-Start Meeting**: • Discuss any safety incidents from previous shifts and risks for current work. • Discuss execution quality from previous shift. • Allocate resources to complete any outstanding planning for new Priority 1 and 2 work. • Confirm the daily work plan and assign tasks and Work Orders to Tradepersons. • Confirm that safety, quality and schedule expectations are clearly understood by all. After the meeting, change the Work Order User Status to In Progress (EXEC) in SAP for any new Urgent work that has been assigned for Execution. Additionally, discuss any current schedule effectiveness issues and potential threats to the W+1 schedule, i.e. planned work bought forward.	**Change PM Orders (IW38)** or **Change Orders and Operations (IW37N)**	**E08 Guideline 4 (step 4b)** **E08 Guideline 4: Team Pre-Start Meeting** agenda
☐	Maintain control of the Work Execution: • Be available to listen to any issues the Tradespersons encounter, and provide assistance and direction as needed. • Attend site and monitor that: ○ Safe work practices followed. ○ Schedule and WO scope is being followed. ○ Work quality meets standards. ○ Planning has been adequate.		**E08 Guideline 4 (step 4d)** **E08 Guideline 4: Team Pre-Start Meeting** agenda
☐	Check that equipment is being returned in fit-for-use condition after work completion (i.e. guards reinstalled, barricading removed, locks off, tools cleared away etc).		**E08 Guideline 4 (step 4e)**
☐	Communicate with Operations Supervisor at end of shift or job, regarding handover of equipment back to Operations.		**E08 Guideline 4 (step 4e)**
☐	Prepare handover notes for the incoming Maintenance Supervisor.		Handover notes
☐	Check that Time Confirmations and Work History (including Cause, Damage and Object codes) have been completed for previous shift, and that subsequent notifications have been raised where needed. Confirm receipt of physical documents (Work Orders, inspection sheets, service sheets etc.) from the Maintenance Tradespeople and that they are signed off where required.	**Change Maintenance Order (IW38)** selecting "In Process" and status CNF *Note: Alternatively, this can be viewed via* **Change Orders and Operations (IW37N)**	**QRG Technically Complete (TECO) PM Order** **QRG Subsequent Notification** **E08 Guideline 5 (step 5b, 5c)**

	TECO work orders where ready or send back to Tradesperson(s) for rectifications.		
☐	For any Work Orders scheduled in the current week that need to be rescheduled, select the Reschedule (RSCH) Work Order User Status and appropriate reason status (NCNE/NCNM/NCNT).	**Change PM Orders (IW38)** or **Change Orders and Operations (IW37N)** *Note: Alternatively,* **Change Maintenance Order (IW32)** *can be used for individual Work Orders*	**E08 Guideline 5 (step 5c)**
☐	Enter new Counter reading (e.g. machine hours) where needed. *Note: This is only applicable for a Counter based plan.*	**Create Measurement Document (IK11)**	**QRG Technically Complete (TECO) PM Order** **E08 Guideline 5 (step 5c)**
☐	Record any improvement opportunities identified in the Work History notes or Tradesperson feedback. These are to be raised at the **Weekly Improvement Meeting** (Wednesday).		**E08 Guideline 5 (step 5c)**
☐	Enter Service Entry Sheets (SES) for all completed contractor services upon receipt of invoice (Leading Hand / Technical Officer to support where required).	**Service Entry Sheet (ML81N)**	**QRG Service Entry Sheet** **E08 Guideline 5 (step 5c)**
☐	Physically check that Rotable items have been tagged and delivered to the warehouse (may delegate).	**Change PM Orders (IW38)** or **Change Orders and Operations (IW37N)** with negative reservations created on components tab *Note: Alternatively,* **Change Maintenance Order (IW32)** *can be used for individual Work Orders*	**QRG Add Rotable Component for Change Out** **E08 Guideline 5 (step 5a)**
☐	Check that any unused, damaged or warranty materials have been returned to the warehouse. *Note: This can be accomplished via a negative reservation (e.g. -1 for 1 unused part) to the Work Order.*	**Change PM Orders (IW38)** or **Change Orders and Operations (IW37N)** *Note: Alternatively,* **Change Maintenance Order (IW32)** *can be used for individual Work Orders*	**E08 Guideline 5 (step 5a)**

Week In the Life Of (WILO)

Below is an overview of the meeting schedule undertaken each week as part of the Maintenance Work Management process.

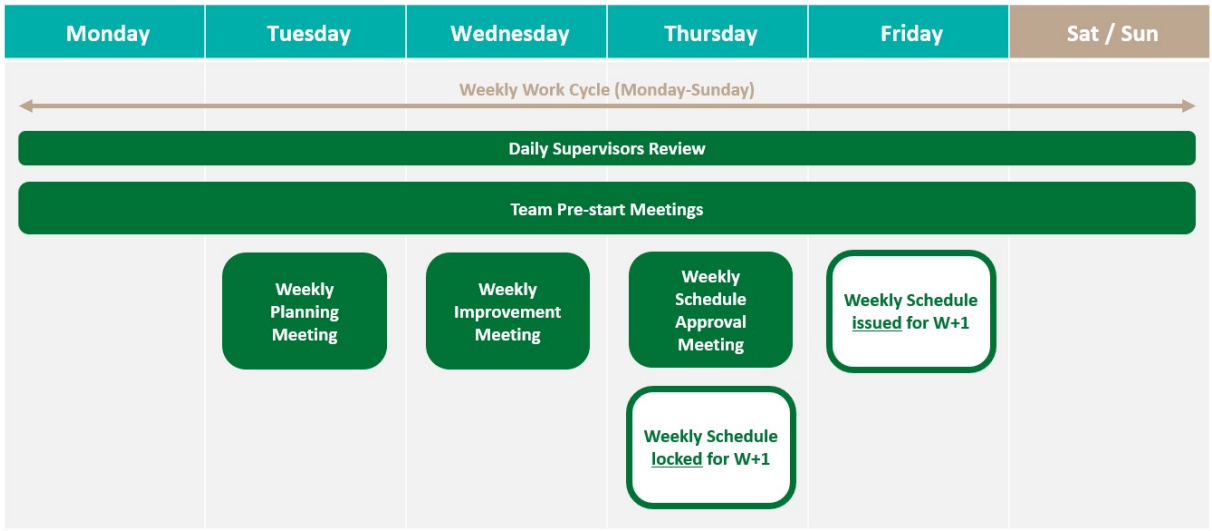

The following is a list of activities that a Maintenance Supervisor should be completing on a **weekly** basis, separated into days:

	Activity	SAP Process	Reference Docs
Monday			
☐	Check completion of Statutory / Critical Control / Safety work for previous week (W-1). Make arrangements to execute or reschedule.	Change PM Orders (IW38) or Change Orders and Operations (IW37N) – review for MaintActivityType = 330/340/630/640	QRG Work Order Search E08 Guideline 4 (step 4d)
☐	Assist Planner to review work centre capacities for the following week (W+1) and update as required.	Prometheus Shift Updater *Note: Refer to DILO / WILO; Maintenance Planner*	QRG Prometheus Shift Sequences - Rosters QRG Prometheus Shift Updater E08 Guideline 3 (step 3a)
☐	Review list of main work priorities for the following week (W+1) in preparation for the **Weekly Planning Meeting** on Tuesday.		E08 Guideline 3 (step 3a)
Tuesday			
☐	Attend the **Weekly Planning Meeting**. Provide input including: • Work priorities		E08 Guideline 3 (step 3b)

	• Requirements from or potential clashes between different work groups • Job step methodology • Work quality requirements • Review if additional labour required • Advise any planning or scheduling requirements for lookahead work		**E08 Guideline 3: Weekly Planning Meeting** agenda
Wednesday			
☐	Attend the **Weekly Improvement Meeting**.		**E08 Guideline 3: Weekly Improvement Meeting** agenda
Thursday			
☐	Attend the **Weekly Schedule Approval Meeting**.	Formal Meeting – outcome is W+1 schedule approved (with final actions) by key stakeholders	**E08 Guideline 3: Weekly Schedule Approval Meeting** agenda
Friday			
☐	Receive copy of printed Work Orders and job packs for W+1 from the Maintenance Planner. Review to ensure they are complete and contain all necessary information.		**E08 Guideline 3 (step 3e)**
☐	Distribute copies of next week's schedule (W+1) to the team (e.g. copy of the schedule posted on a wall).		**E08 Guideline 3 (step 3e)**



GLENCORE

160 Ann Street · Brisbane · QLD 4000 · Australia
Tel +61 7 3833 8500 · Web www.glencore.com.au

Glencore Australia Holdings Pty Limited ABN 37 160 626 102