GLENCORE

Maintenance Work Management

DILO

MAINTENANCE TRADESPERSON

08

Date, Version	27/01/2022, v1.0
Department, Area	Glencore Copper, Operational Excellence
Prepared by	D Ord, M O'Neill (Bluefield AMS)
Reviewed by	R Reisener, A Green (Glencore Copper)
Comment/s	Published

Table of Contents


Overview & Purpose 2
Day In the Life Of (DILO) 3

Overview & Purpose

The Glencore Copper Asset Management Framework (AMF) enables the business to deliver its Asset Management purpose and vision, as defined in the AMF Policy. The Framework consists of 18 Elements, detailed in Manuals that define how Glencore Copper manages the whole life of its assets to optimise value and ensure assets are capable of meeting the business and stakeholder objectives.

Maintenance Work Management is Element 08 of the AMF and defines effective work management practices and performance requirements to enable work to be performed safely, efficiently, with precision and when required.

This document is intended to provide Maintenance Tradespersons with guidance on how to approach their daily work within the **Maintenance Work Management** process. A **Guideline** document is available for each of the six sub-processes of **Maintenance Work Management** process shown below, detailing how to complete each process step, and should be referred to for further understanding.

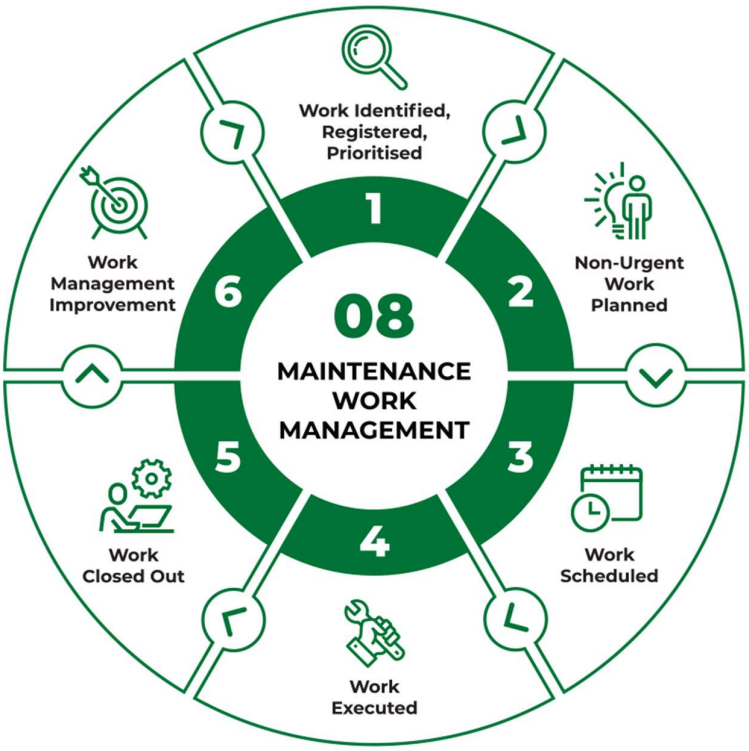

Day In the Life Of (DILO)

The following is a list of activities that a Maintenance Tradesperson should be completing on a **daily** basis:

	Activity	SAP Process	Reference Docs
☐	Attend the daily **Team Pre-Start Meeting**. Ensure that you know the tasks and Work Orders you have been allocated, and any associated safety, quality or other risks. Print Work Order and attached documents if required.		QRG Print Work Order E08 Guideline 4 (step 4b)
☐	Execute the work in accordance with the schedule, scope, quality standards and within agreed timeframes. Record relevant job information during Execution to later capture in SAP. Escalate issues to Maintenance Supervisor as needed.		E08 Guideline 4 (step 4c)
☐	Following work completion, return equipment to Fit-For-Use condition (tools and waste cleared away, guards replaced, barricading removed, isolation locks removed etc) and close permits.		E08 Guideline 4 (step 4e)
☐	Return any unused parts and materials to stores. This shall be completed via a negative reservation (e.g. -1 for 1 unused part) to the Work Order For any Rotables removed during work, clean and tag the equipment and drop off at Warehouse location.	Change Order Component List (IW3K)	E08 Guideline 5 (step 5a)
☐	Raise new Notifications for new or additional work. *Note: Confirm that the requirement for additional work has not already been raised via a previous Notification*	Create PM Notification – General (IW21) *Note: Alternatively, this can be performed via* Functional Location Structure (IH01)	QRG Create PM Notification QRG Create Subsequent Notification QRG GOS Attachment to Notification E08 Guideline 1 (step 1b) and 5 (step 5a)
☐	When considering the requirement for new or urgent work, review work for the scheduled period for any synergies	Display Orders & Operations (IW49N)	E08 Guideline 1 (step 1d)
☐	Complete actual work hours (Time Confirmations) against Work Orders.	Enter PM Order Confirmation (IW41)	QRG Time Confirmation - Notification Completion E08 Guideline 5 (step 5b)

☐	Enter Work History notes for completed work and close the Notification. Also confirm and update the Cause, Damage and Object Codes.	**Enter PM Order Confirmation (IW41)** – Based on previous step, the Notification can be accessed via the "Notification" button *Note: Alternatively, this can be performed via* **Change PM Notification (IW22)**	**QRG Time Confirmation - Notification Completion** **E08 Guideline 5 (step 5b)**
☐	Sign-off (where required) and return physical documents (Work Orders, inspection sheets, service sheets etc.) to the Maintenance Supervisor for record keeping. Make note of any documentation improvements / amendments for follow through by the Supervisor.		**E08 Guideline 5 (step 5b)** **E08 Guideline 6 (step 6a)**
☐	Develop detailed work scopes for Notifications as directed by the Maintenance Supervisor. *Note: This shall be completed for Notifications whereby they are already created. Refer to "Raise new Notifications for new or additional work" if the Notification does not exist.*	**Change PM Notification (IW22)** *Note: Alternatively, this can be performed via* **Change Notifications (IW28)** *when completing for multiple Notifications*	**E08 Guideline 1 (step 1d)**
☐	Order parts and materials (add Components) for new Priority 1 and 2 Work Orders as directed by the Maintenance Supervisor.	**Change Order Component List (IW3K)**	**QRG Create Reservation Trades** **QRG Material Search** **E08 Guideline 4 (step 4a)**
☐	Perform parts kitting as directed by the Maintenance Supervisor.		**E08 Guideline 2 (step 2e)**



GLENCORE

160 Ann Street · Brisbane · QLD 4000 · Australia
Tel +61 7 3833 8500 · Web www.glencore.com.au

Glencore Australia Holdings Pty Limited ABN 37 160 626 102